



MLEDTECH MNS VISION SERIES OUTDOOR POLE/ARM-MOUNT


- DLC Premium listed
- Industry leading efficacy at over 124 lm/watt for the entire fixture
- Light weight / Easy installation
- Heat Sink is protected from elements to maintain 100% heat transfer

Mledtech llc.
6700 Alexander Bell Dr | Suite 200 | Columbia MD 21046
202 681 0599 | Sales@mledtech.com



	Unit	MNS-SB-100W	MNS-SB-150W	MNS-SB-200W	MNS-SB-240W	MNS-SB-300W
Wattage	Watts	100	150	200	240	300
Replace Existing (HID)	Watts	250	400	400	1000	1000
Light Output at Fixture	Lumens	12200	18600	24600	29040	36300
Fixture Efficacy	lm / watt	122	124	123	121	121
Color Rendering Index	Ra	80 ⁺	80 ⁺	80 ⁺	80 ⁺	80 ⁺
L" X W" X H"	inches	15" X 14.4" X 5"	17" X 14.4" X 5"	20" X 14.4" X 5"	24" X 14.4" X 5"	29" X 14.4" X 5"
Weight	lbs	15	17	19	22	24
LED brand / Quantity:		LG (200)	LG (312)	LG (416)	LG (520)	LG (624)
LED Driver:		Meanwell HLG	Meanwell HLG	Meanwell HLG	Meanwell HLG	Meanwell HLG
Input voltage:	Volts	AC100-277V	AC100-277V	AC100-277V	AC100-277V	AC100-277V
Input frequency:	hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Operating Temp.:		-30°C/50°C	-30°C/50°C	-30°C/50°C	-30°C/50°C	-30°C/50°C
IP rating:		IP65	IP65	IP65	IP65	IP65
Power factor:		>0.96	>0.96	>0.96	>0.96	>0.96
Lifespan:	hours	60000	60000	60000	60000	60000
Lense / Beam angle options:	Degree	Type 3/Type 5	Type 3/Type 5	Type 3/Type 5	Type 3/Type 5	Type 3/Type 5
Warranty:	Years	5	5	5	5	5
Color temperature:	Kelvin	3000K / 3500K / 4000K / 4500K / 5000K / 5700K				
Certification:		DLC, UL, CUL, CE, ROHS, CCC				
DLC Primary Use Category:		Outdoor Pole/Arm-Mounted Area and Roadway Luminaires				
Material:		Extruded Aluminum				
Options:						
Photocell :		NEMA Receptacle / Photocell / Shorting Cap				
Voltage :		AC100V-277V / 480V				
Fixture Color:		Bronze / Black / White				
Mount Option:		A / B / C / D / E Bracket				

Accessories are as follows:

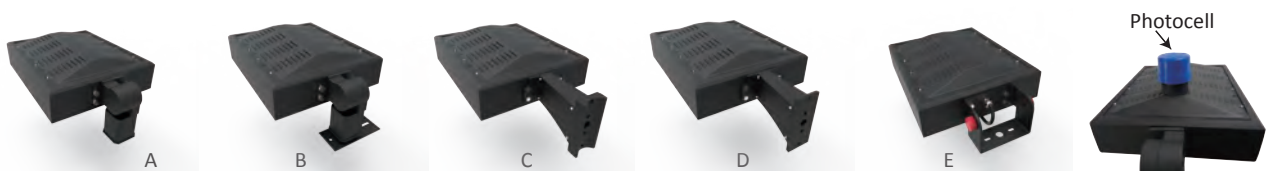

Applications

Parking Lot, Tennis court, Plaza, Shopping mall Roadway, Other public area.